



Standard range of perforated metal and woven wire mesh (304 & 316) Stainless Steel

Standard Perforated Metal Range				
Hole mm	Pitch mm	Open Area	304 S/Steel	316L S/Steel
0.5	1.00	23 %	●	
0.8	1.50	25 %	●	●
1.0	2.00	23 %	●	
1.1	2.00	23 %		●
1.5	2.75	26 %	●	●
2.0	3.00	40 %	●	
2.0	3.50	30 %	●	●
3.0	4.00	50 %	●	●
3.0	5.00	32 %	●	●
4.0	5.00	58 %	●	
4.0	6.00	40 %	●	
4.0	7.00	29 %	●	●
5.0	6.00	63 %	●	
5.0	7.00	45 %	●	●
5.0	8.00	35 %	●	●
5.0	10.0	23 %	●	
6.0	8.50	45 %	●	
6.0	9.00	40 %	●	
6.0	12.0	23 %	●	
8.0	11.0	47 %	●	●
8.0	12.0	40%	●	
10.0	13.0	53 %	●	
10.0	15.0	40 %	●	●
12.0	17.0	45 %	●	
15.0	20.0	50 %	●	
15.0	21.0	46 %	●	

Standard Woven Wire Range, 316		
Aperture mm	Aperture Micron	Open Area
1.000	1000	42
0.900	900	50
0.810	810	41
0.745	745	49
0.710	710	31
0.600	600	32
0.570	570	46
0.530	530	39
0.415	514	40
0.310	310	38
0.260	260	35
0.210	210	34
0.190	190	34
0.150	150	36
0.130	130	37
0.110	110	37
0.100	100	37
0.090	90	42
0.080	80	38
0.063	63	38
0.056	56	40
0.053	53	32
Hollander Weave Woven Wire Mesh		
0.040	40	
0.035	35	
0.025	25	
0.015	15	
0.010	10	

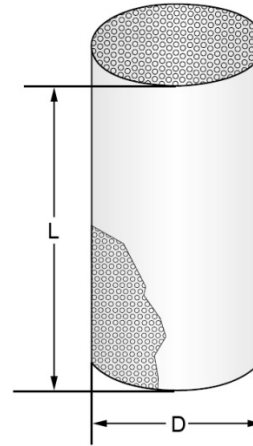

Please complete and return		
D	O.D.	
L	Length	
Removal Size		
Material	<input type="checkbox"/> 304	<input type="checkbox"/> 316
Reinforcing		
Units required		
Notes		
Contact Name		
Company		
Email		
Phone		

Refer to above chart for standard removal sizes

Email: sales@monarchindustrial.com.au

Fax: +61 (0) 7 3889 9117

OFFICE USE ONLY			
Monarch Asia Pacific Pty Ltd www.monarchindustrial.com.au		Description	
		Drawn By	Job Ref
		Date	
Not to Scale		Dwg No.	Rev